

Air Brake DOT Push To Connect Fittings




Applications:


- * Used with SAE J844 or DIN 73378 /DIN 74324 tubing.
- Designed for DIN and D.O.T. truck and trailer applications.

Features:

- * Material: Brass, NBR/EPDM O Ring
- * Meet D.O.T. FMVSS 571.106 air brake specifications
- * Easy and fast assembly by hand, no special tools asked
- * Reuseable: connect and disconnect numerous times
- * Pre-applied Teflon: loctite 516 on male pipe
- * Positive Seal: After tubing is inserted, seal is made no leakage
- * Pressure Range: Vacuum to 150PSI (Imperial fitting) and 220PSI (Metric fitting)
- * Temperature Rang: -40°F to 212°F (-40°C to 100°C)

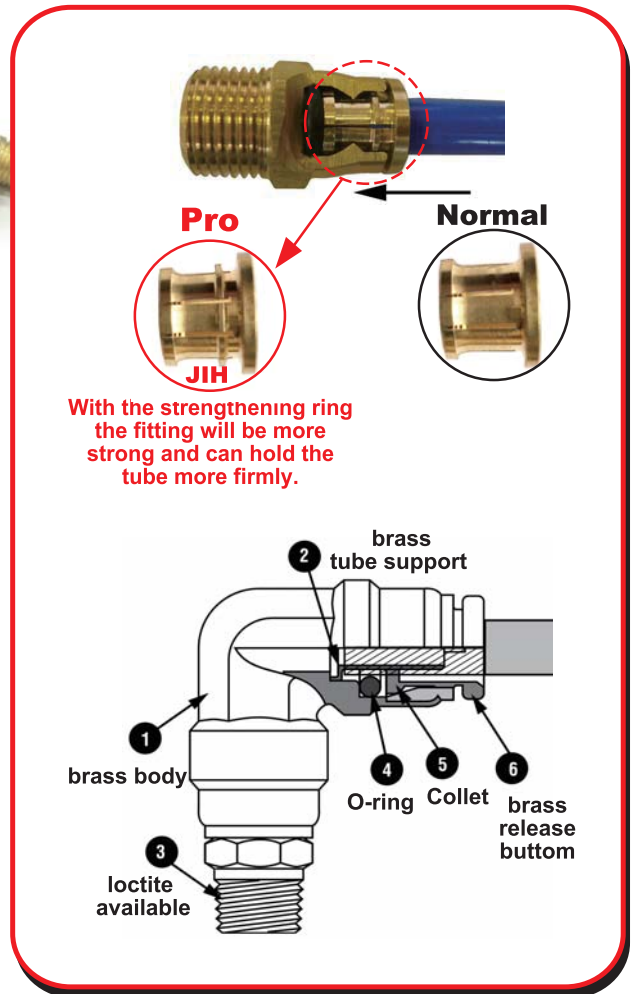

How To Order:

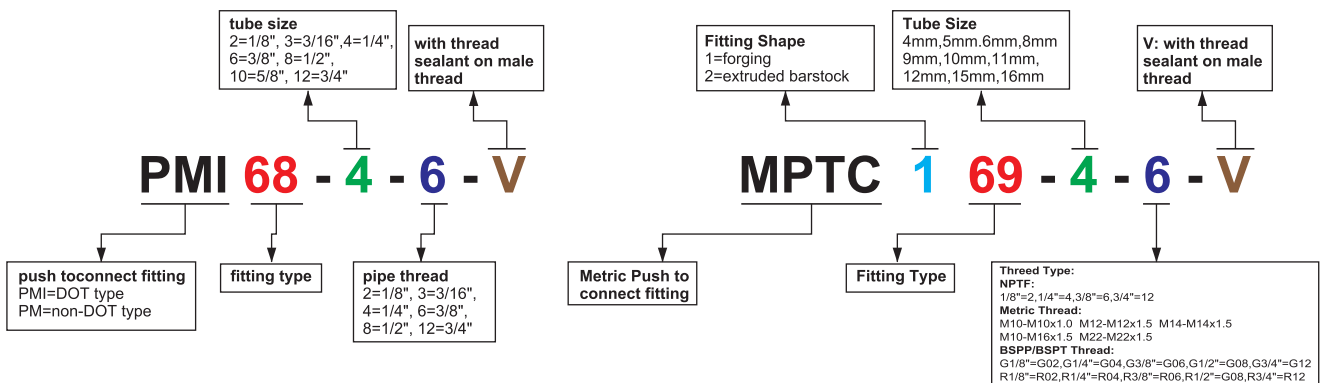

JUST IN HARDWARE CO., LTD.

Add: Wuxi City, Jiangsu, China / Tainan City, Taiwan
 Tel: +86-510-83897891/92/93 Fax: +86-510-83897895
 E-mail: sales2@justinhardware.com
 www.justinhardware.com
 www.justinfitting.com